


# > BR-B160-01-E

## STANDARD TOW-BAR H160



*Picture not contractual*

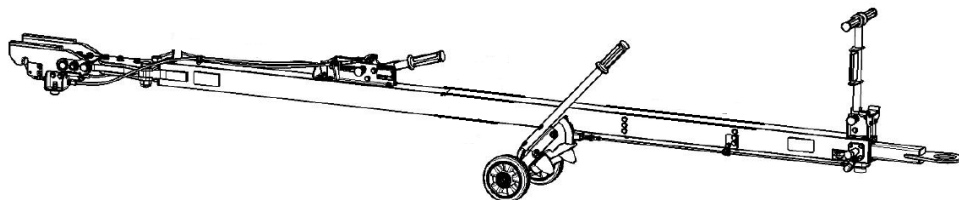

### DESCRIPTION

The Standard Tow-Bar is a rigid hitch that attaches to both the NLG and the tractor for the purpose of moving the helicopter from point A to point B.

Installation feasible by an operator on flat ground and with good weather conditions. 2 operators are needed for an installation in bad weather or inclined ground. The 2nd operator should be used to guide the operator installing the bar.

*Additional spare parts **FUSE-SET-160** (kit of 10 torsions and 10 tractions) can be purchased if necessary.*



### KEY FEATURES

**Weight of the tow bar :** 40 kg

**Dimensions :** 2950 x 400 x 600 mm

**Maximum load in traction :** 1720 daN

**Maximum load during turn :** 1865 Nm



### APPLICABILITY

H160

#### CONTACT US

+33 467 455 564

150, Rue Maurice Bédart - 34080 - Montpellier, FRANCE

contact@kit-aero.com / www.kit-aero.com



**KIT-AERO**

Matériel et outillage pour l'aéronautique